


SPZ-2

適用M.3V.3VX.SPZベルト

Unit : mm

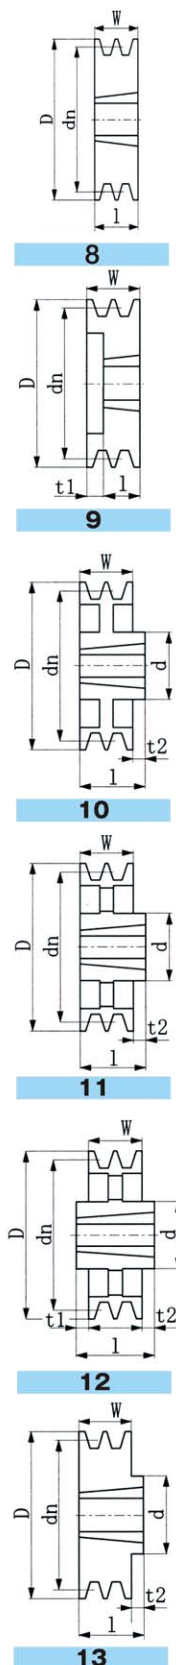

品番 Part No.	デーラム径 dn	外径 D	ブッシング Bushing		ボス部 Hub				リム幅 W	質量 (kg)	形状図番 Type
			品番 No.	最大軸穴径 Max.Bore	d	t1	t2	l			
SPZ 56-2	56	60	1008	25		27		22	49	0.57	9
SPZ 60-2	60	64	1108	28		27		22	49	0.66	9
SPZ 63-2	63	67	1108	28				28	28	0.31	8
SPZ 67-2	67	71	1108	28				28	28	0.4	8
SPZ 71-2	71	75	1108	28				28	28	0.48	8
SPZ 75-2	75	79	1210	32				28	28	0.44	8
SPZ 80-2	80	84	1210	32				28	28	0.54	8
SPZ 85-2	85	89	1610	42				28	28	0.53	8
SPZ 90-2	90	94	1610	42				28	28	0.68	8
SPZ 95-2	95	99	1610	42				28	28	0.81	8
SPZ 100-2	100	104	1610	42				28	28	0.97	8
SPZ 106-2	106	110	1610	42				28	28	1.2	8
SPZ 112-2	112	116	1610	42				28	28	1.4	8
SPZ 118-2	118	122	1610	42				28	28	1.6	8
SPZ 125-2	125	129	1610	42				28	28	1.9	8
SPZ 132-2	132	136	1610	42				28	28	2.1	8
SPZ 140-2	140	144	1610	42				28	28	2.5	8
SPZ 150-2	150	154	2012	50	106		4	32	28	3	13
SPZ 160-2	160	164	2012	50	106		4	32	28	3.7	13
SPZ 170-2	170	174	2012	50	106		4	32	28	3.8	13
SPZ 180-2	180	184	2012	50	106		4	32	28	3.4	10
SPZ 190-2	190	194	2012	50	106		4	32	28	3.6	10
SPZ 200-2	200	204	2012	50	106		4	32	28	3.8	10
SPZ 212-2	212	216	2012	50	106		4	32	28	4	10
SPZ 224-2	224	228	2012	50	106		4	32	28	4.3	10
SPZ 236-2	236	240	2012	50	106		4	32	28	4.7	10
SPZ 250-2	250	254	2012	50	106		4	32	28	5.2	10
SPZ 265-2	265	269	2012	50	112		4	32	28	5.8	10
SPZ 280-2	280	284	2012	50	106		4	32	28	6.5	10
SPZ 300-2	300	304	2012	50	106		4	32	28	6.9	10
SPZ 315-2	315	319	2012	50	106		4	32	28	7.9	10
SPZ 355-2	355	359	2012	50	106	2	2	32	28	7.8	12
SPZ 400-2	400	404	2517	60	125		17	45	28	9.8	11
SPZ 450-2	450	454	2517	60	125	8.5	8.5	45	28	11.2	12
SPZ 500-2	500	504	2517	60	125	8.5	8.5	45	28	15.7	12

*質量はプーリ単体です。

*最大軸穴径は新JIS平行キーまたは、シャローキーを適用する場合があります。